

Murano User Guide

Murano User Guide

v0.2

Publication date 2013-09-09

Abstract

This document is intended for individuals who wish to use Murano Product.

Table of Contents

1. How can I use Murano Service?	1
Document change history	1
2. Murano dashboard plugin	2
Creating environment	2
Creating service prototype	3
Active Directory	4
Internet Information Service	6
Internet Information Web Farm Service	7
ASP.NET Service	8
ASP.NET Farm Service	9
MS SQL Service	10
SQL Server Failover Cluster	11
Deploying environment	14
Working with deployed environment	16
Redeploying Murano Environment	18
Deleting	18
Browsing Murano Deployment	19
Renaming Murano Environment	21
Troubleshooting	22

Chapter 1. How can I use Murano Service?

Murano is intended to get opportunity for non-experienced users to deploy reliable Windows-based environments extremely simple. This document describes process of creation virtual Windows Environment with different services.

Document change history

The following table describes the most recent changes:

Revision Date	Summary of Changes
September. 4, 2013	• Initial document creation.

Chapter 2. Murano dashboard plugin

To use Murano you should be familiar with Openstack. Murano Dashboard is just a plugin to Openstack dashboard - Horizon. Please visit [horizon user guide](http://docs.openstack.org/user-guide/content/) [http://docs.openstack.org/user-guide/content/] first to see how dashboard is organized and how to login to it.

Creating environment


Once you installed all Murano components and login to horizon dashboard successfully you will see Environments panel:

The screenshot shows the 'Overview' page of the OpenStack Horizon dashboard. The left sidebar contains navigation links for 'Project', 'Manage Compute', and 'Other'. The 'Environments' link under 'Other' is highlighted. The main content area displays 'Quota Summary' with usage bars for instances, vCPUs, RAM, volumes, and volume storage. Below this is a 'Usage Summary' table with columns for Instance Name, VCPUs, Disk, RAM, and Uptime. The table is currently empty, showing 'No items to display.' and 'Displaying 0 items'.

First thing you need to do is to create an environment - virtual Windows Data Center which will contain different Windows services. To do this, navigate to the "Environments" page and click the "Create Environment". After setting name to your virtual environment it will be created.


The screenshot shows the 'Environments' page of the OpenStack Horizon dashboard. The left sidebar contains navigation links for 'Project', 'Manage Compute', and 'Other'. The 'Environments' link under 'Other' is highlighted. The main content area displays a table with columns for Name, Status, and Actions. The table is currently empty, showing 'No items to display.' and 'Displaying 0 items'. A 'Create Environment' button is visible in the top right corner.

Just created environment has status *Ready to configure*.

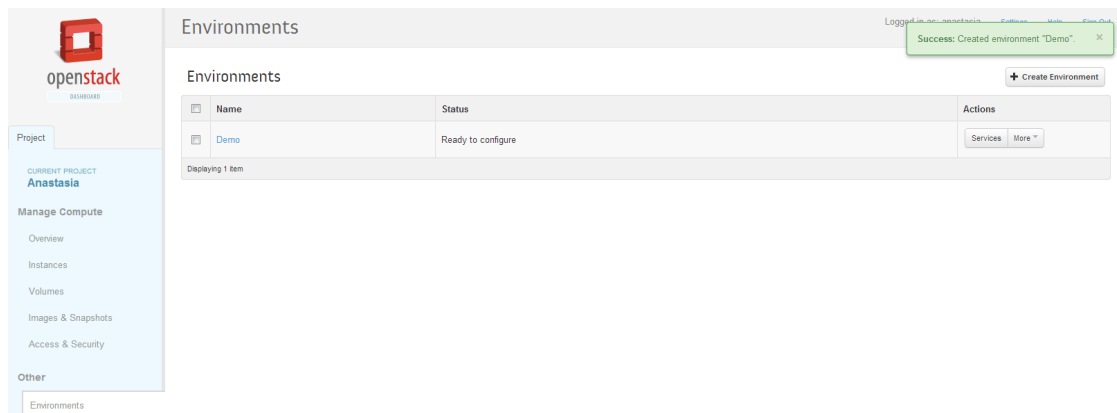


Creating service prototype

All services should be created in the context of Environment - virtual Windows Data Center. After Environment is created, you need to create services prototypes and then deploy the Environment. When deploy process is done instances with your services will be spawned in Openstack. To create a service prototype navigate to page with the list of environment services by clicking on the environment name (or on the "Services" button) and then, click the "Create Service" button.

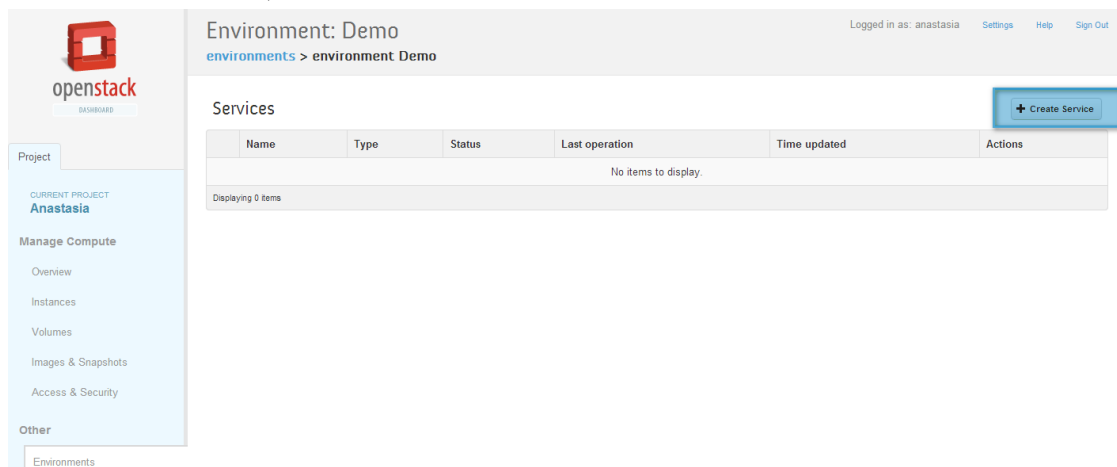

You have an opportunity to create one of the following services:

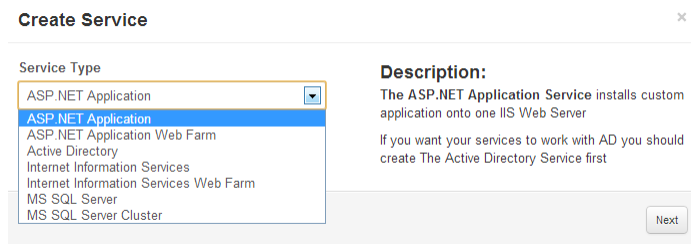

Once you choose service that you want to create click "Next" and fill the form. Forms for each service are specific. To see more information about filling the form for a specific service follow one of the link below:

- **Active Directory:** Active Directory is a directory service implemented by Microsoft for Windows domain networks. In one installation, in addition to primary Domain Controller, you can add optional count of secondary Domain Controllers. Any other services you are intending to create can be joined to that domain.

- **Internet Information Service:** IIS is a web server and a set of feature extension modules.
- **Internet Information Web Farm Service:** Murano installs the Web Farm Framework on the controller server, configures the primary server and prepares the secondary servers. In addition load balancer is installed to monitor service statuses.
- **ASP.NET Service:** is a server-side Web application framework designed for Web development to produce dynamic Web pages. Service is able to install custom application onto one IIS Web Server. Murano installs all needed components and makes proper configuration.
- **ASP.NET Farm Service:** ASP.NET Farm Service installs a custom application on a load-balanced array of IIS servers
- **MS SQL Service:** Microsoft SQL Service is a relational database management system.
- **SQL Server Failover Cluster:** Murano installs all needed components and configures your SQL Server Cluster the way you want.

On the last step of creating service prototype you have opportunity to set the hardware flavor of the instance which will be created - and the image with the operating system, which will be installed on the instance. Also you may select availability zone, if there are more then one in your environment.

Create Service ×

Instance flavor

m1.medium

Instance image

Windows Server 2012 Standard

Availability zone

nova

Internet Information Services Service

Instance Configuration: Specify some instance parameters on which service would be created.

Instance flavor: Select registered in Openstack flavor. Consider that service performance depends on this parameter.

Instance image: Select valid image for a service. Image should already be prepared and registered in glance.

Availability zone: Select availability zone where service would be installed.

Back

Create

Active Directory

After you picked the Active Directory service in service creation wizard you'll see the following form:

Create Service ×

Domain Name

Instance Count

Account Name

Administrator password

Confirm password

Recovery password

Confirm password

Hostname template

Active Directory Service

Domain Name: Enter a desired name for a new domain. This name should fit to DNS Domain Name requirements: it should contain only A-Z, a-z, 0-9, (.) and (-) and should not end with a dash. DNS server will be automatically set up on each of the Domain Controller instances. Note: Only first 15 characters or characters before first period is used as NetBIOS name.

Instance Count: You can create several Active Directory instances by setting instance number larger than one. One primary Domain Controller and a few secondary DCs will be created.

Passwords: Windows requires strong password for service administration. Your password should have at least one letter in each register, a number and a special character. Password length should be a minimum of 7 characters. Once you forget your password you won't be able to operate the service until recovery password would be entered. So it's better for Recovery and Administrator password to be different.

Hostname template: For your convenience all instance hostnames can be named in the same way. Enter a name and use # character for incrementation. For example, host# turns into host1, host2, etc. Please follow Windows hostname restrictions.

[Back](#)[Next](#)

Enter or select values for this fields:

Domain name	Enter a desired name for a new domain. This name should fit to DNS Domain Name requirements: it should contain only A-Z, a-z, 0-9, (.) and (-) and should not end with a dash. DNS server will be automatically set up on each of the Domain Controller instances. Period characters are allowed only when they are used to delimit the components of domain style names. Single-level domain is not appropriate. Note: Only first 15 characters or characters before first period is used as NetBIOS name.
Instance Count	You can create several Active Directory instances by setting instance number larger than one. One primary Domain Controller and a few secondary DCs will be created.
Account Name	You account will have Active Directory administrator rights. So initial value is "Administrator" but you can change it to any name you like.
Administrator password	Windows requires strong password for service administration. Your password should have at least one letter in each register, a number and a special character. Password length should be a minimum of 7 characters.

	Once you forget your password you won't be able to operate the service until recovery password would be entered. So it's better for Recovery and Administrator password to be different.
Confirm password	Password confirmation is required.
Recovery password	Restrictions are the same as for the Administrator password. Please provide password that is different from Administrator. It's not required for form validation though.
Confirm password	Password confirmation is required.

Internet Information Service

Create Service ×

Service Name

Administrator password

Confirm password

Domain

Hostname template

Internet Information Services Service

Standalone IIS Server

Service Name: Enter a desired name for a service. Just A-Z, a-z, 0-9, dash and underline are allowed.

Passwords: Windows requires strong password for service administration. Your password should have at least one letter in each register, a number and a special character. Password length should be a minimum of 7 characters.

Domain: Service can be joined to the Active Directory domain. If you want to create an AD domain create the AD Service first.

Hostname template: For your convenience all instance hostnames can be named in the same way. Enter a name and use # character for incrementation. For example, host# turns into host1, host2, etc. Please follow Windows hostname restrictions.

Back

Next

Internet Information Web Farm Service

Create Service



Service Name

Administrator password

Confirm password

Domain

Instance Count

Load Balancer port

Hostname template

Internet Information Services Web Farm Service

A load-balanced array of IIS servers

Service Name: Enter a desired name for a service. Just A-Z, a-z, 0-9, dash and underline are allowed.

Passwords: Windows requires strong password for service administration. Your password should have at least one letter in each register, a number and a special character. Password length should be a minimum of 7 characters.

Domain: Service can be joined to the Active Directory domain. If you want to create an AD domain create the AD Service first.

Instance Count: Several instances with IIS Service can be created at one time.

Load Balancer port: Specify port number where Load Balancer will be running

Hostname template: For your convenience all instance hostnames can be named in the same way. Enter a name and use # character for incrementation. For example, host# turns into host1, host2, etc. Please follow Windows hostname restrictions.

Back

Next

ASP.NET Service

Create Service



Service Name

Administrator password

Confirm password

Domain

Git repository

Hostname template

ASP.NET Application Service

ASP.NET application will be installed onto one IISWeb Server

Service Name: Enter a desired name for a service. Just A-Z, a-z, 0-9, dash and underline are allowed.

Passwords: Windows requires strong password for service administration. Your password should have at least one letter in each register, a number and a special character. Password length should be a minimum of 7 characters.

Domain: Service can be joined to the Active Directory domain. If you want to create an AD domain create the AD Service first.

Git repository: URL of a git repository with the application you want to deploy.

Hostname template: For your convenience all instance hostnames can be named in the same way. Enter a name and use # character for incrementation. For example, host# turns into host1, host2, etc. Please follow Windows hostname restrictions.

Back

Next

ASP.NET Farm Service

Create Service ✕

Service Name <input type="text"/>	<h3>ASP.NET Application Web Farm Service</h3> <p>The ASP.NET application will be installed on a number of IIS Web Servers, and load balancing will be configured.</p> <p>Service Name: Enter a desired name for a service. Just A-Z, a-z, 0-9, dash and underline are allowed.</p> <p>Passwords: Windows requires strong password for service administration. Your password should have at least one letter in each register, a number and a special character. Password length should be a minimum of 7 characters.</p> <p>Domain: Service can be joined to the Active Directory domain. If you want to create an AD domain create the AD Service first.</p> <p>Git repository: URL of a git repository with the application you want to deploy.</p> <p>Instance Count: Several instances with ASP.NET application can be created at one time.</p> <p>Load Balancer port: Specify port number where Load Balancer will be running</p> <p>Hostname template: For your convenience all instance hostnames can be named in the same way. Enter a name and use # character for incrementation. For example, host# turns into host1, host2, etc. Please follow Windows hostname restrictions.</p>
Administrator password <input type="password"/>	
Confirm password <input type="password"/>	
Domain <input type="text" value="Not in domain"/>	
Git repository <input type="text"/>	
Instance Count <input type="text" value="2"/>	
Load Balancer port <input type="text" value="80"/>	
Hostname template <input type="text" value="Optional"/>	

Back Next

MS SQL Service

Create Service ×

<p>Service Name</p> <input type="text"/>	<h3>MS SQL Server Service</h3> <p>MS SQL Server</p> <p>Service Name: Enter a desired name for a service. Just A-Z, a-z, 0-9, dash and underline are allowed.</p> <p>Passwords: Windows requires strong password for service administration. Your password should have at least one letter in each register, a number and a special character. Password length should be a minimum of 7 characters.</p> <p>Domain: Service can be joined to the Active Directory domain. If you want to create an AD domain create the AD Service first.</p> <p>Mixed-mode Authentication: Mixed authentication mode allows the use of Windows credentials but supplements them with local SQL Server user accounts that the administrator may create and maintain within SQL Server. If this mode is on SA password is required</p> <p>SA Password: Set system administrator password for the MS SQL Server.</p> <p>Hostname template: For your convenience all instance hostnames can be named in the same way. Enter a name and use # character for incrementation. For example, host# turns into host1, host2, etc. Please follow Windows hostname restrictions.</p>
<p>Administrator password</p> <input type="password"/>	
<p>Confirm password</p> <input type="password"/>	
<p>Domain</p> <input type="text" value="Not in domain"/>	
<p><input checked="" type="checkbox"/> Mixed-mode Authentication</p>	
<p>SA Password</p> <input type="password"/>	
<p>Confirm password</p> <input type="password"/>	
<p>Hostname template</p> <input type="text" value="Optional"/>	

SQL Server Failover Cluster

Create Service
✕

Service Name

MS SQL Server Cluster Service

MS SQL Failover Cluster

Service Name: Enter a desired name for a service. Just A-Z, a-z, 0-9, dash and underline are allowed.

Passwords: Windows requires strong password for service administration. Your password should have at least one letter in each register, a number and a special character. Password length should be a minimum of 7 characters.

Domain: Service can be joined to the Active Directory domain. If you want to create an AD domain create the AD Service first.

Mixed-mode Authentication: Mixed authentication mode allows the use of Windows credentials but supplements them with local SQL Server user accounts that the administrator may create and maintain within SQL Server. If this mode is on SA password is required

SA Password: Set system administrator password for the MS SQL Server.

Administrator password

Confirm password

Active Directory is configured by the System Administrator

Domain

Mixed-mode Authentication

SA Password

Confirm password

Back Next

Enter or select values for the following fields:

Service Name	Enter a desired name for a service. Just A-Z, a-z, 0-9, dash and underline are allowed.
Administrator password	Windows requires strong password for service administration. Your password should have at least one letter in each register, a number and a special character. Password length should be a minimum of 7 characters.
Confirm password	Password confirmation is required.
Active Directory is configured by the System Administrator	Enable this option only if you have properly configured rules that will include service to the domain, that already exists in you environment. Once you set this option to true, additional fields will appear. (See information below)
Domain	Service should be joined to the Active Directory domain. Please, create Active Directory Service prototype first.
Mixed-mode Authentication	Mixed authentication mode allows the use of Windows credentials but supplements them with local SQL Server user accounts that the administrator may create and maintain within SQL Server. If this mode is on SA password is required

SA Password	Set system administrator password for the MS SQL Server. Password requirements are the same as previous.
-------------	----------------------------------------------------------------------------------------------------------

In case pre-configured AD is enabled following fields will appeared:

Active Directory is configured by the System Administrator

Active Directory User

Active Directory Password

Confirm password

Domain

Active Directory User Active Directory Password	Specify administrator user credentials to the existent AD domain (to which service service will be join according to your system automation setup)
----------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------

Create Service ×

Cluster Static IP <input type="text"/>	<h3>MS SQL Server Cluster Service</h3> <p>Cluster Static IP: Specify a valid IPv4 fixed IP.</p> <p>Cluster Name: Specify a name of a cluster. Just A-Z, a-z, 0-9, dash and underline are allowed.</p> <p>Availability Group Name: Specify a name of an AG. Just A-Z, a-z, 0-9, dash and underline are allowed.</p> <p>Availability Group Listener Name: Specify a name of an AG Listener . Just A-Z, a-z, 0-9, dash and underline are allowed.</p> <p>Availability Group Listener IP: Specify a valid IPv4 fixed IP.</p> <p>SQL User Name: User name that will be created to manage cluster instances.</p> <p>SQL User Password: User password that will be created to manage cluster instances.</p> <p>Instance Count: Microsoft SQL Failover Cluster includes up to 5 instances.</p> <p>Hostname template: For your convenience all instance hostnames can be named in the same way. Enter a name and use # character for incrementation. For example, host# turns into host1, host2, etc. Please follow Windows hostname restrictions.</p>
Cluster Name <input type="text"/>	
Availability Group Name <input type="text"/>	
Availability Group Listener Name <input type="text"/>	
Availability Group Listener IP <input type="text"/>	
SQL User Name <input type="text"/>	
SQL User Password <input type="text"/>	
Confirm password <input type="text"/>	
Instance Count <input type="text" value="2"/>	
Hostname template <input type="text" value="Optional"/>	

Create Service ×

Nodes

Node	Sync	Primary
node1	<input checked="" type="checkbox"/>	<input checked="" type="radio"/>
node2	<input checked="" type="checkbox"/>	<input type="radio"/>

Database list

MS SQL Server Cluster Service

Nodes: Configure cluster instances. Cluster node quantity can be set with 'Add' and 'Remove' buttons. Configure Sync mode by enabling corresponding checkbox. All other nodes will be in Async mode. Just 2 nodes are allowed to be Sync. Also one Master node need to be selected. SQL Failover cluster has limit of 5 instances.

Database list: Specify names for new databases which will be created as part of service installation. Here should come comma-separated list of database names, where each name has the following syntax: first symbol should be latin letter or underscore; subsequent symbols can be latin letter, numeric, underscore, at sign, number sign or dollar sign.

Deploying environment

Once all services are prepared you can send environment to deploy. Just press the "Deploy Environment" button.

The screenshot shows the OpenStack dashboard interface. On the left is a navigation sidebar with the OpenStack logo and menu items like 'Project', 'Manage Compute', and 'Other'. The main content area is titled 'Environment: Demo' and shows a table of services. The table has columns for Name, Type, Status, Last operation, Time updated, and Actions. Two services are listed: 'demo.com' (Active Directory) and 'IISdemo' (Internet Information Services Web Farm), both with a status of 'Configuring'. A 'Deploy This Environment' button is highlighted in blue at the top right of the services table.

Name	Type	Status	Last operation	Time updated	Actions
demo.com	Active Directory	Configuring	Service draft created	2013-09-05 01:01:30	Delete Service
IISdemo	Internet Information Services Web Farm	Configuring	Service draft created	2013-09-05 01:02:19	Delete Service

And you'll see a message about successful start of deploying your services in Openstack. Since now all you have to do is just wait for a little bit while Murano installing and configuring your services.

Environment: Demo
environments > environment Demo

Success: Deploy started

Services

<input type="checkbox"/>	Name	Type	Status	Last operation	Time updated	Actions
<input type="checkbox"/>	demo.com	Active Directory	Deploy in progress	Service draft created	2013-09-05 01:01:30	
<input type="checkbox"/>	IISdemo	Internet Information Services Web Farm	Deploy in progress	Service draft created	2013-09-05 01:02:19	

Displaying 2 items

You can monitor deploying process. Just go to the Log tab on service detailed page, where you can get by clicking on the service name.

Environment: Demo
environments > environment Demo

Logged in as: anastasia Settings Help Sign Out

Services

+ Create Service Delete Services Deploy This Environment

<input type="checkbox"/>	Name	Type	Status	Last operation	Time updated	Actions
<input type="checkbox"/>	demo.com	Active Directory	Ready	Primary Domain Controller created	2013-09-05 21:44:01	Delete Service
<input type="checkbox"/>	IISdemo	Internet Information Services Web Farm	Ready	Unit n/hj/hl9hi0713 (IISdemo_instance_0) has joined domain demo.com	2013-09-05 21:47:24	Delete Service

Displaying 2 items

And now you can see installation progress.

Service Detail: demo.com
environments > environment Demo > service demo.com


Logged in as: anastasia Settings Help Sign Out

Service Logs


```

2013-09-05 21:25:41 - Creating instance ad (demo.com_instance_0)
2013-09-05 21:28:16 - Instance ad (demo.com_instance_0) created
2013-09-05 21:28:19 - Creating Primary Domain Controller on unit ad (demo.com_instance_0)
2013-09-05 21:44:01 - Primary Domain Controller created
    
```

As long as installation and configuration are in progress, environment is in *Deploy in progress* state. Depending on how many services you are deploying or how many nodes in your cluster, process of spawning instances, installation and post installation settings takes from 10 minutes up to one hour.

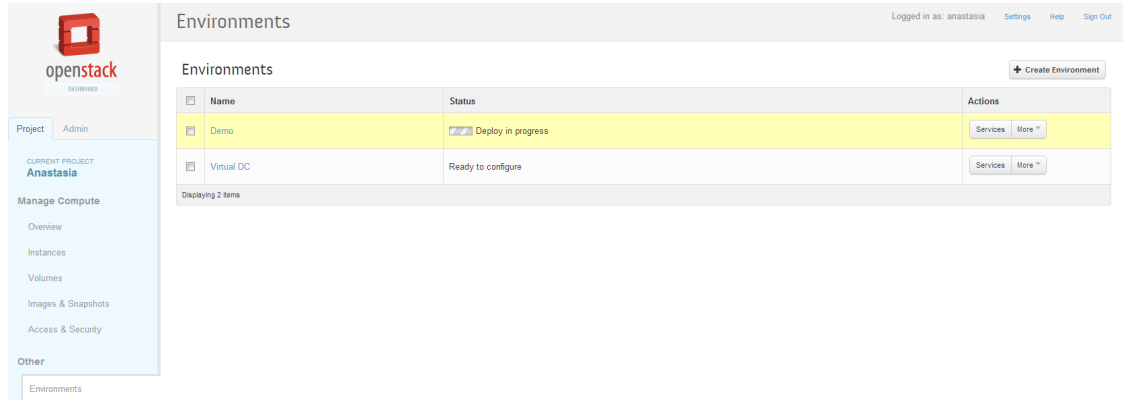

If installation process finished without any errors, environment changes its status to *Ready*:

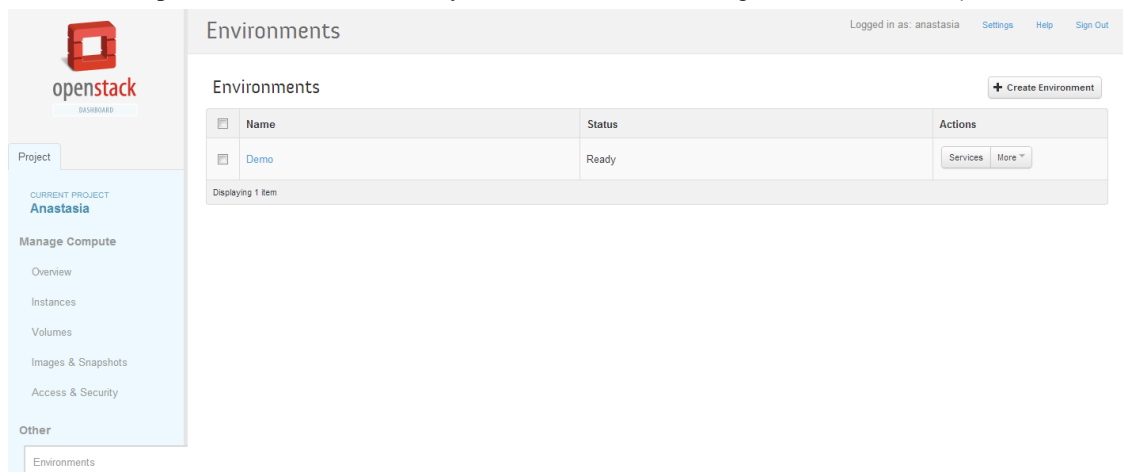

Working with deployed environment

Congratulations! After some time waiting you are able to operate with the services. To get information about installed services, navigate to service detailed page. To do that click on the environment name and then on the name of the service you want to know about.

The screenshot shows the OpenStack Murano dashboard interface. On the left is a navigation sidebar with the OpenStack logo and menu items like 'Project', 'Admin', 'Manage Compute', and 'Other'. The main content area is titled 'Service Detail: IISdemo' and shows a breadcrumb trail: 'environments > environment Demo > service IISdemo'. The service details are organized into sections: 'Info' (Name: IISdemo, ID: 83e46d472d3d49199763bec4b4effe44, Type: Internet Information Services Web Farm, Status: Ready, Domain: demo.com, Load Balancer URI: 80), 'Service unit1' (Hostname: mhyfhl8h0713, Service instance name: e489cd02b66d4abd8b251fedcf0d3350f.mhyfhl8h0713), and 'Service unit2' (Hostname: llchhl8h0774, Service instance name: e489cd02b66d4abd8b251fedcf0d3350f.llchhl8h0774). A URL bar at the bottom shows '172.18.79.30/horizon/project/murano/environments'.

Now you are seeing general information about the service in terms of Murano Environment. To get information about the instance in Openstack terms follow the link on service instance name.

Service unit1


Hostname

IIS1

Service instance name

e98a933da40ee4dc096b7f7d7be4fa3de.IIS1

You can login to the virtual machine directly from the horizon (if your Openstack installation allows you) or by RDP protocol.

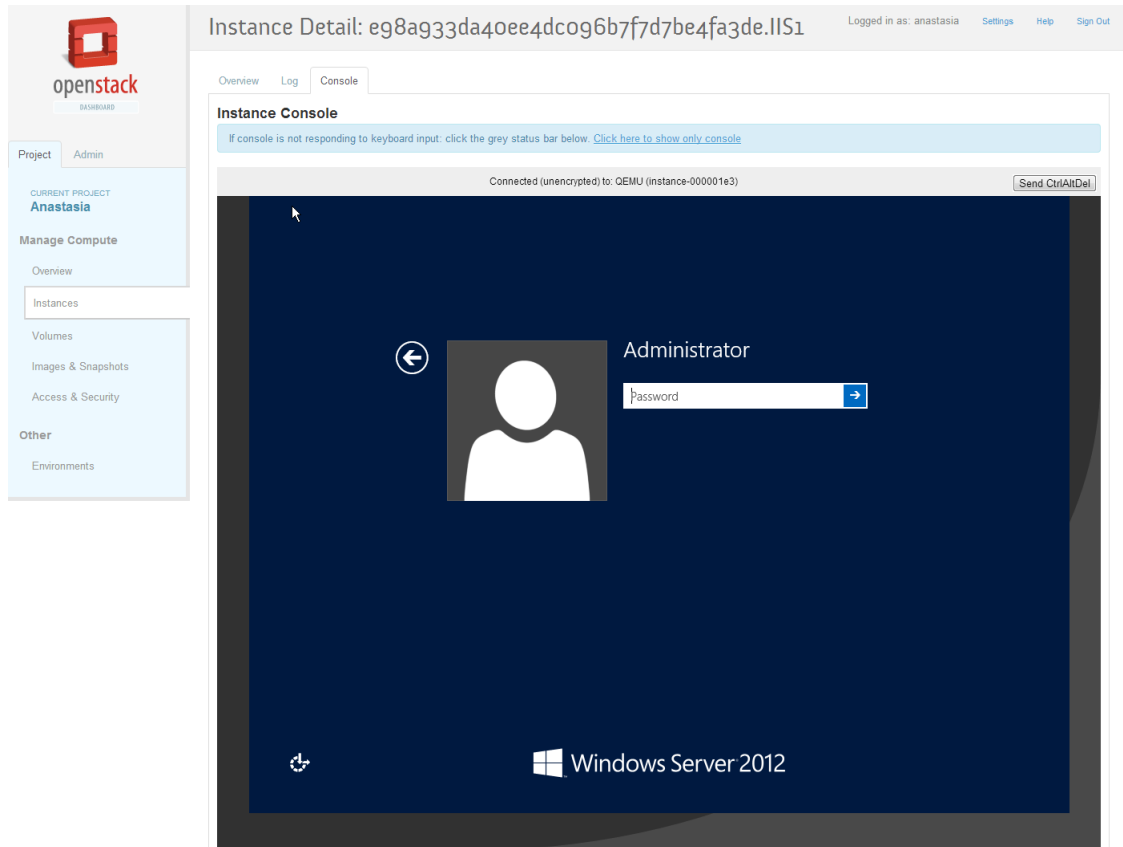

There are more things you can do with Murano Environment:

- Add new services and deploy it again;
- Delete outdated and unnecessary environments or services;
- Browse deployment history and service installation logs;
- Rename your environment.


Redeploying Murano Environment

Murano gives an opportunity to supplement already deployed environment. Thus if you already deployed the Active Directory service and want to add any other services just create desired service prototype and click the "Deploy This Environment" button. During service prototype creation you can join this service to the existent Active Directory domain.

Deleting


Services as well as environments can be easily deleted.

- To delete an environment go to the environment index page and click "More" -> "Delete Environment" in Actions column of ready to delete environment.

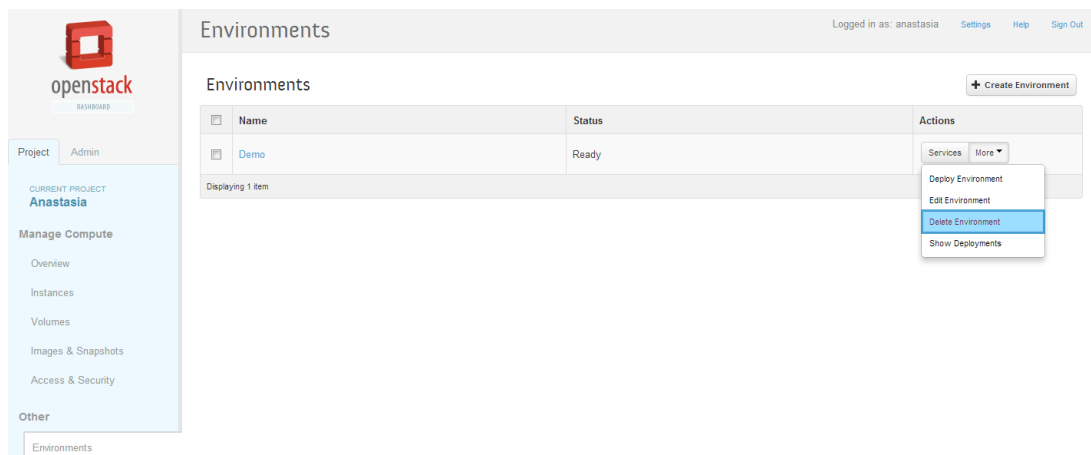


Environment deletion means to kill all services with instances on which they are installed. Instances will be scheduled to delete right after you choose the "Delete Environment" action.

- To delete a service go service list page and click the "Delete Service" button in Actions column. **Note:** If you are deleting service that was already deployed you'll need to *Deploy* the environment again by pressing corresponding button. In case you want to delete service prototype - it has "Service draft created" in the *Last operation* column (see the screenshot below) - changes applies right away.

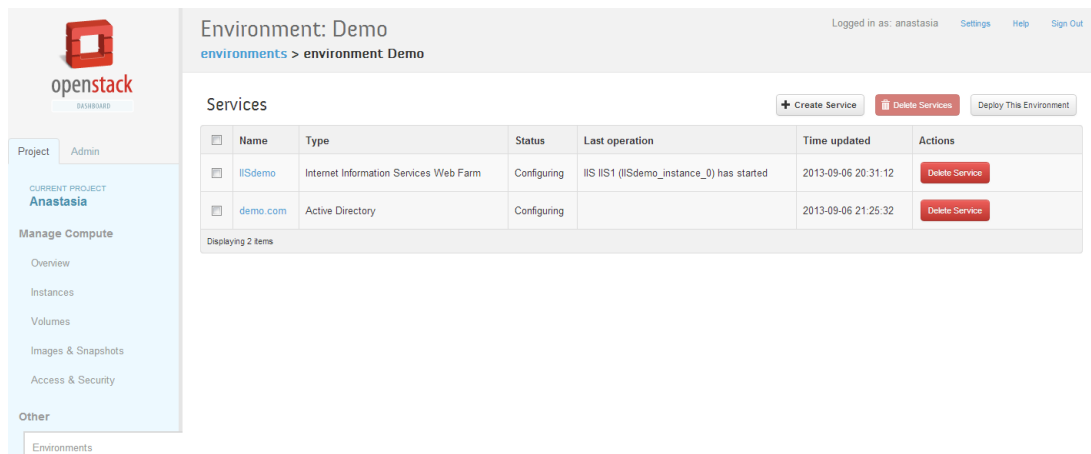


Browsing Murano Deployment


Since Murano Environment can be deployed many times you may want to see the history of its deployments. To do that click the "More-> Show deployments" button on environments index page:

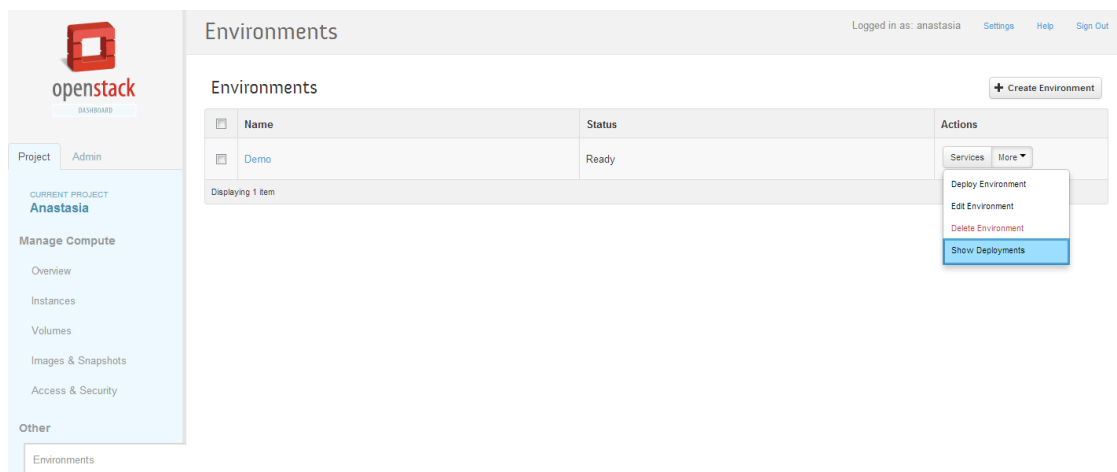


From this page it's easy to see how many times and when Murano Environment was deployed:

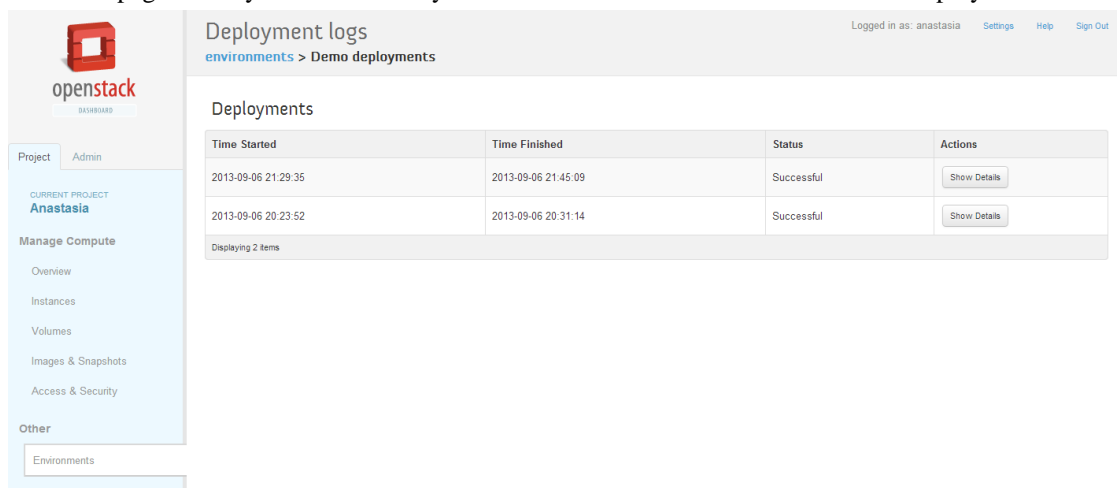

For each deployment you can get a detailed information by clicking the "Show Details" button. You always can go back to any level using navigation string at the page header. From here you can observe what services were installed during deployment:

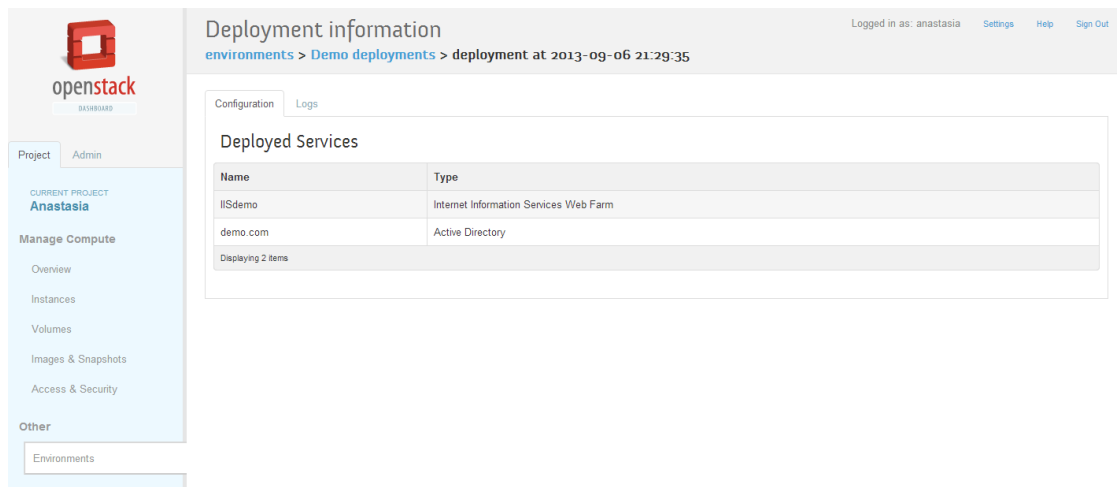


Also deployment logs are available at the "Logs" tab:

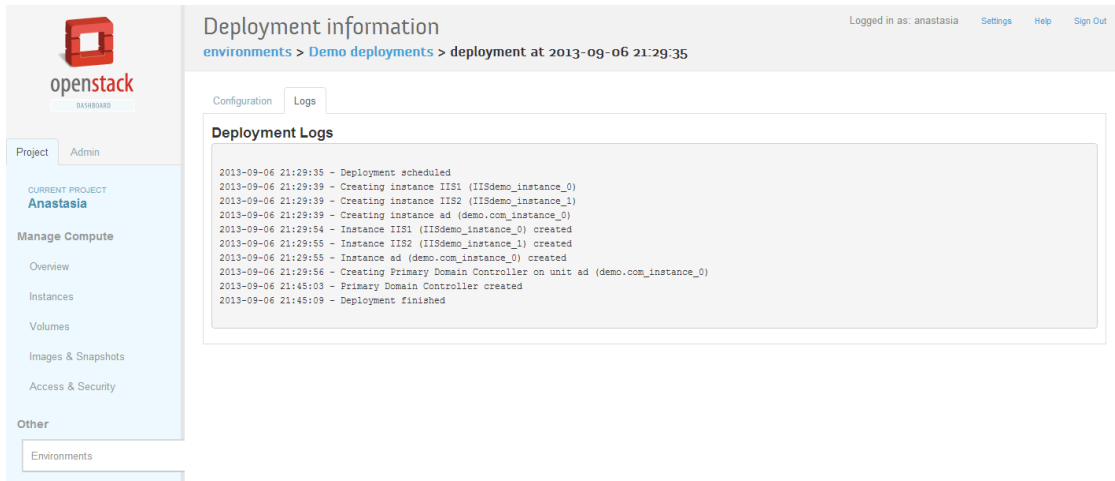


Renaming Murano Environment

It's possible to change a name of your environment: just click the "More-> Edit Environment" button on environment index page:

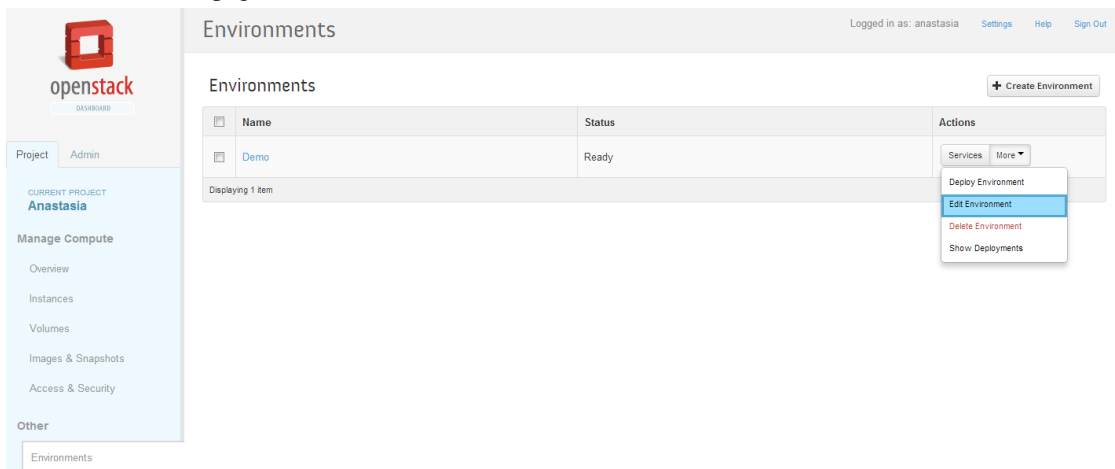

Environment name is not involved in service creation process so you can use spaces and any other characters you want.

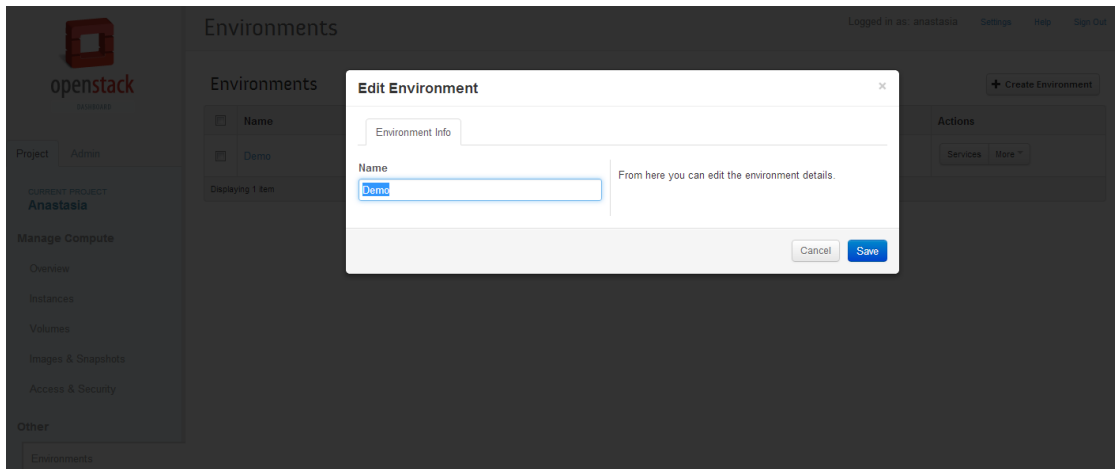

Troubleshooting

How to debug OpenStack Heat?

If you can execute Heat command via console interface - all good. It is the most simple way to check Heat state on the node - just execute CLI command 'heat list'. See more information about Heat in openstack wiki page [<https://wiki.openstack.org/wiki/Heat/TroubleShooting>]

If 'heat list' returns 503 error

It means that OpenStack Heat configuration files contain incorrect credentials. Need to set 'user' = 'heat' and change passwords 'verybadpass' in all configuration files from directory /etc/heat/

If 'heat list' hangs up

Sometimes you can see that 'heat list' hangs up. The root of this problem - connection to the rabbitMQ.

How I can connect to LoadBalancer instance in Server Farms?

First of all you should have KeyPair file 'murano-lb-key'. You can create this file using commands

```
nova keypair-add murano-lb-key > murano-lb-key.priv
chmod 600 murano-lb-key.priv
```

And after that server farms need to be created with this KeyPair. The second step is to 'how to connect to VM with LoadBalancer':

```
ssh -i murano-lb-key.priv root@10.0.0.3
```

Murano dashboard can not connect to Murano API. How I can fix it?

This problem has two ways to fix: Add string

```
MURANO_API_URL='http://localhost:8082'
```

to the /etc/openstack-dashboard/local_settings (or /etc/openstack-dashboard/local_settings.py - it depends on OpenStack configuration) and after that web server restart is needed. Add keystone endpoints for Murano API

```
keystone service-create --name muranoapi --type murano --description "Murano-API S
keystone endpoint-create --region RegionOne --service-id
--publicurl http://localhost:8082 --internalurl http://localhost:8082 --adminurl h
```

Murano API Service does not work on CentOS 6.x. WebUI can not connect to this service. How to fix this?

The problem in pip lib routes. Need to upgrade this lib and restart Murano API:

```
python-pip install routes --upgrade
initctl stop murano-api
initctl start murano-api
```

Error 'Unexpected state' during the deployment of Web Farms. What the problem?

Sometimes we can see in deployments logs:

```
2013-08-06 09:10:07 - Unable to deploy instance ipkrmhk0vzq4b6 (asp-farm_instance_
2013-08-06 09:10:07 - Unable to create a Server Farm load balancer on unit ipkrmhk
```

The root of this problem is incorrect configuration - Heat can not create Load Balancer instance. Please, remember that you should have admin access for the project in OpenStack to deploy LoadBalancer and also, you should have KeyPair with default name 'murano-lb-key'.

Error in Murano API logs 'No module named helpers.token_sanitizer'

This pip version problem. Need to install pip 1.4 and after that reinstall murano-client, murano-common and murano-api.